

## FURTHER MANOSPLINT HEATING SOLUTIONS



### DRY HEAT OVEN

- Water-free technology
- Extremely fast to heat up
- Hygienic heating solutions
- Portable
- Large heating surface (470 x 460mm)



### TRADITIONAL SPLINTING WATER BATHS

- Four sizes available – 5L, 9L, 28L, 56L
- Lift Off and Hinge Lid Options
- Thermostat control
- Built-in carry handles
- Two-year warranty



### HEAT GUN

- Powerful 2000W heat gun
- Two heat settings
- Wide flat base when standing
- Easy access controls
- Ergonomic



## STRAVA SPLINT BATH

A CLEAN, SMART DESIGN



### UK Enquiries:

Kinetec Medical Products UK Ltd  
7 Redan Hill Industrial Estate  
Redan Road  
Aldershot  
GU12 4SJ  
Tel: 01252 931980  
Fax: 01252 329415  
enquiries@kinetecuk.com  
www.kinetecinternational.com

### International Enquiries:

Kinetec SAS  
Zone Industrielle de Tournes  
Rue Maurice Périn  
F-08090 Tournes  
France  
Tel: +33 324 29 85 05  
Fax: +33 324 33 51 05  
contact@kinetec.fr  
www.kinetec.fr




99.9%  
kill rate

# INNOVATIVE DESIGN


The state-of-the-art Strava splint bath is the first of its kind, precisely engineered to take the guess work out for the therapist.

The Strava splint bath is made of a thermoset material, known for its insulation, flammability resistance, durability and aesthetic appeal. An easily-accessible, transparent hinged lid along with unique convection heat exchanger technology make for quick and uniform heat distribution of the water.

- Automatic on/off means unit is ready when the clinic opens and energy efficient at night when not in use
- Quick and simple water evacuation with pump/valve system
- Precise water temperature reading at +/-2 F
- Full colour, custom LCD display




# A SYSTEMATIC APPROACH TO INFECTION PREVENTION

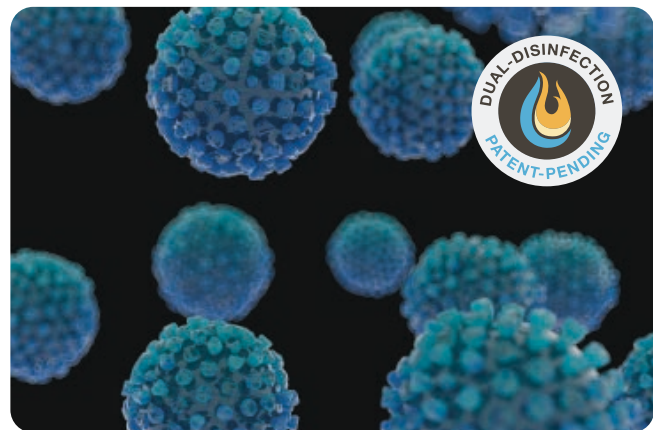

Unit disinfection and patient cross contamination are common concerns in hospital and clinical environments. Our proprietary cleaning system uses both UV-C sterilization cycling and a high-heat cleaning cycle to effectively sterilize the bath. This dual cleaning system insures the water is 99.99% free of microbes.

In addition, the automatic drainage pump makes water evacuation quick and easy for tub cleaning and water replacement. This systematic approach makes the Strava splint bath the most hygienic on the market, without exception.

- **99.9% kill rate** of introduced microbes
- Continuous UV-C light @ 254 nm wavelength emitted over the circulating water.
- Extreme, high heat disinfection of the water is automatically set to run nightly.
- Auto evacuation of the water for quick and easy tub cleaning.



UV-C LIGHT



HIGH HEAT SANITATION

The answer to cross contamination concerns between patients.

The only splint bath on the market designed with two methods of disinfection.

Full customisation of presets and rich in additional features, exclusively with Strava.




# INTERACTIVE USER EXPERIENCE

Traditional splint bath controls are antiquated and imprecise. The user interface on the Strava splint bath has an easy to read timer and temperature always on display.

A full menu of features allows for clinician control and customization. Users can select from an array of thermoplastic settings from the top thermoplastic manufacturers or create a menu of their own.

'the most hygienic on the market, without exception'

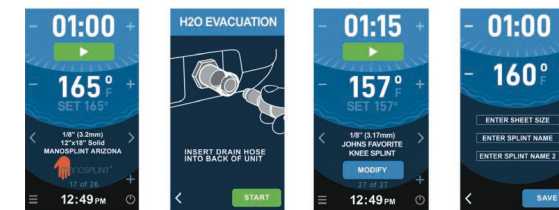

# TECHNICAL SPECIFICATIONS

STRAVA SPLINT BATH	UM	SPEC
REF 100.600		
Operating Temperature Range	F	140° - 180° F
	C	60° - 82° C
Sanitation Mode	F	185°
	C	85°
Temperature Variability	F/C	2°
Set time	Seconds	30 - 180
Over Voltage	W	11
Frequency	Hz	50/60 Hz
Mains Voltage (+/- 10% of nominal voltage)	V	100-200 VAC, 200-240 VAC
AC Current (Max)	A	<13 Amps
Water Fill Capacity	Gallons	5.2 G
	Litres	20 L
Water Fill Height	in	5"
	cm	12.5cm
Unit Weight	lbs	35lbs
	kg	15.9kg
Unit Dims Outer (LxWxH)	in	22.625"L 19.75"W 10"H
	cm	60cm L 52cm W 25.5cm H
Unit Dims Inner (LxWxH)	in	19"L 12"W 6"H
	cm	48cm L 30cm W 15cm H
Standard		IEC 61010-1, -2
		UL 61010-1, -2
		CSA C22.2#61010-1, -2
		CB SCHEME
Environment (Altitude)		
Operation (Max)	ft	16,732 ft
	m	5100m
Storage (Altitude)	ft	16,732 ft
	m	5100m

